

MULTI-BIOMETRIC IDENTIFICATION TERMINAL

The Intelligent Appliance for Fingerprint & Face & Card Identification

*Large Face Capacity and
Allgraded Performance*



Dual cameras to capture the facial image in real color



User-defined function keys



4.3" TFT touch screen




Backup battery (optional)


- 4.3" TFT touch screen, elegant design, fashionable and simple interface.
- 6 user-defined function keys, easy operation.
- Infrared optical system enables user identification in dark environment.
- Composite algorithm system providing highest operating speed.
- Optional built in backup battery support extra 4 hours continuous operation if power failure.
- Built-in wireless WIFI or GPRS communication for option.



FA1-H

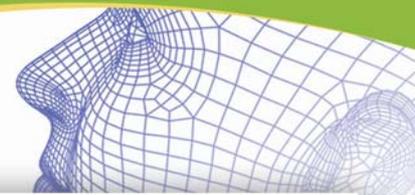

SKETCH DIAGRAM

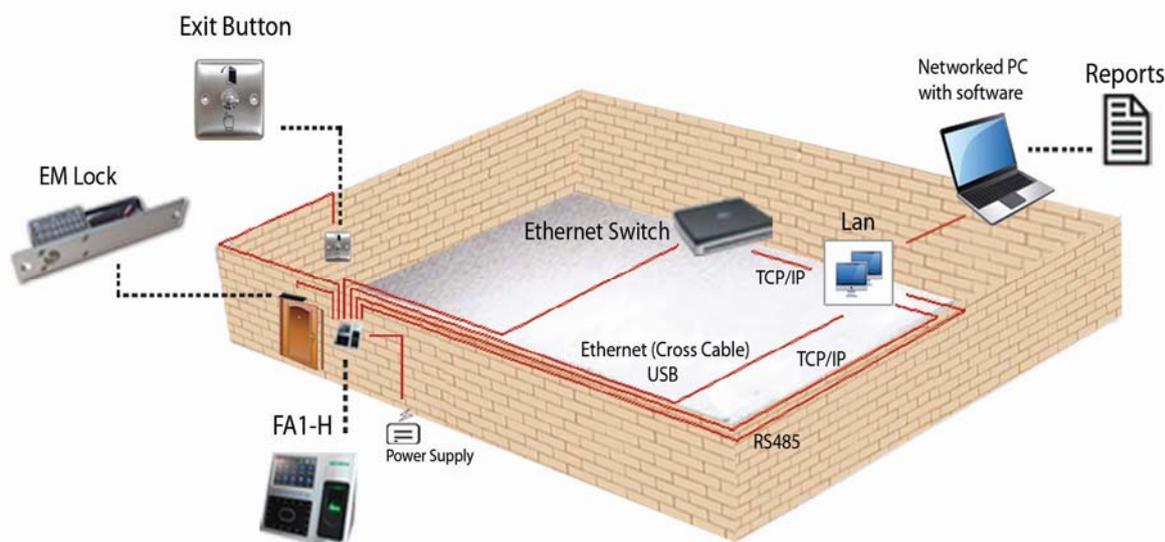

SPECIFICATION

FA1-H

LCD Display

4.3" TFT Touch Screen

Speaker

Voice prompt (language can be selected)

Capacity

Face: 1200(1:N)

Fingerprint: 2,000

Logs: 100,000

Verification

Verification speed (1:1) $\leq 0.5s$

Identification speed (1:1) $\leq 1s$

Identification

FRR $\leq 0.01\%$ FAR $\leq 0.0001\%$

Attendance status

Check in/out, break in/out, OT in/out

Communications

TCP/IP, RS232/485, USB Hostx2

Access control

Built-in relay, Door Sensor, Wiegand out

Cameras

High Definition Infrared Cameras

Language

Multi language, English, French, Spanish, Arabic, Turkish, Portuguese, Czech, Hebrew, Slavic, Vietnamese etc., for more than 40 languages can be selected

Environment

Operation temperature: $0^{\circ}C-45^{\circ}C$ Operation humidity: 20%-80%

Memory

256M flash, 64 SDRAM

Power Supply

110/220 VAC-12VDC 3A

Package info.

Machine size: 19.4(L)*16.5(W)*86(H)cm Unit packing: 31*26*12cm

Carton packing: 50*34*38cm Real weight: 1.6kg Volume weight: 2.0kg

Function support

Scheduled bell; DLST; Self-inquiry; Workcode; SMS; T9 input; Multi-alarm; Photo ID

Customize Function

Wifi; GPRS; Printer support; Webserver; Li-battery