


SKETCH DIAGRAM

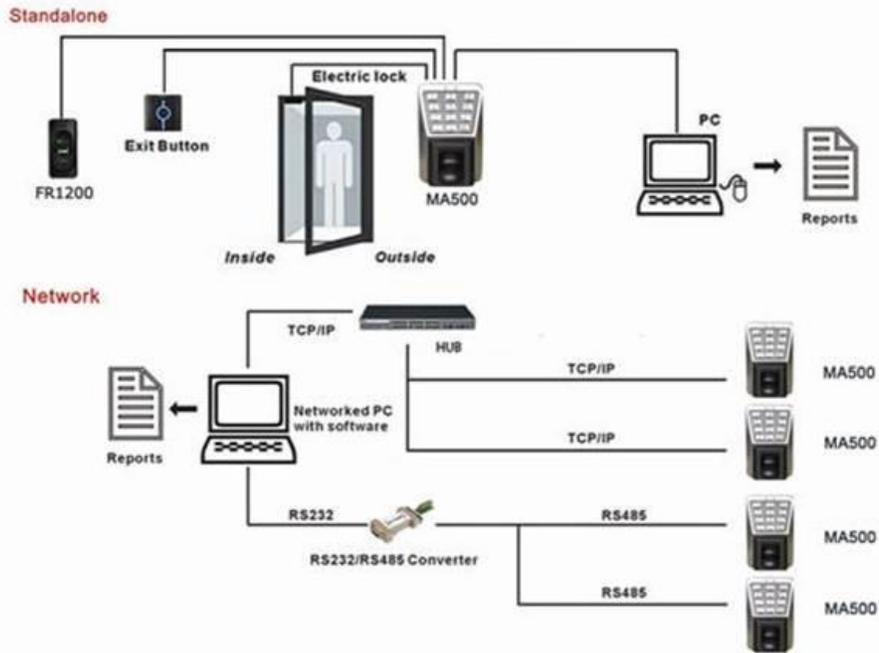

SPECIFICATION

MA500

LCD Display	Identification
N/A	FRR: ≤0.01% FAR: ≤0.0001%
Capacity	Environment
Fingerprint: 3,000 ID Card: 30,000	Operation temperature: -10°C- 50°C
Log: 100,000	Operation humidity: 10% - 90%
SDK	Index of Protection
New PULL SDK	IP65
Sensor	Power Supply
Optical Sensor with protective cover	110/220 VAC-12VDC (PS-3A is optional item)
Communications	Package info.:
RS485, TCP/IP	Machine size: 8.3(L)*5.8(W)*12.5(H)cm
Access Control	Unit packing: 16*14.5*11.5cm Carton packing: 50*30*30cm
Electric lock, Door sensor, Alarm, Exit button	Real weight :0.7kg Volume weight: 1kg
Wiegand Signal	Customize Function
Output	EM(standard)/Mifare(optional)
Authentication Method	
FP only, ROnly, PIN only, FP/RF/PIN, PIN&FP, PIN&RF	